

I'VE GOT THE POWER2GO

Your Mobile Power Station



E-Mobility



Drive
System



Energy Storage
Systems



Power- and
Garden Tools



Industrial



Medical

TECHNICAL DETAILS



Basic parameters	POWER2GO LIFE	POWER2GO WORK
Cell chemistry	Lithium-ion	Lithium-ion
Capacity	2,500 Wh / Increase via serial connection	2,500 Wh / Increase via serial connection
Nominal power	2,400 W	2,400 W
Max. power	3,600 W	3,600 W
Output voltage	120 V / 20 A / 2400 W	120 V / 20 A / 2400 W
Charging voltage	120 V / 60 Hz	120 V / 60 Hz
Charging power	1,000 W	1,000 W
Output socket	1 x 120 V / 20 A / 2400 W plug 4 x USB C (2 x 10 und 2 x 100 W)	2 x 120 V / 20 A / 2400 W plug
Input socket	C14 connector MC4 solar connector	C14 connector MC4 solar connector
Weight	~25 kg	~25 kg
Dimensions (L x W x H)	475 x 199 x 373 x mm	531 x 233 x 467 mm incl. handle
Degree of protection	IP65 all covers closed	IP65 all covers closed
Operating temperature	-10 °C to + 60 °C	-10 °C to + 60 °C
Charging temperature	0 °C to + 45 °C	0 °C to + 45 °C
Certification	UL 2743, UN 38.3, CE	UL 2743, UN 38.3, CE
Indicators	LCD display	LED indicator
Enclosure type	Aluminum	Aluminum
Accessories		
MPPT	30-60Vdc; 8.5A	30-60Vdc; 8.5A
Solar panel	< 500 W	< 500 W

POWER2GO LIFE

Whether at the campsite, in nature, or just for the garden – your high performance and large power bank for versatile use.



Handle recess

Power Switch
ON/OFF

LED / beam light


LED switch

LCD display

Type C USB Port

120 VAC outlet
with cover

FRONT VIEW

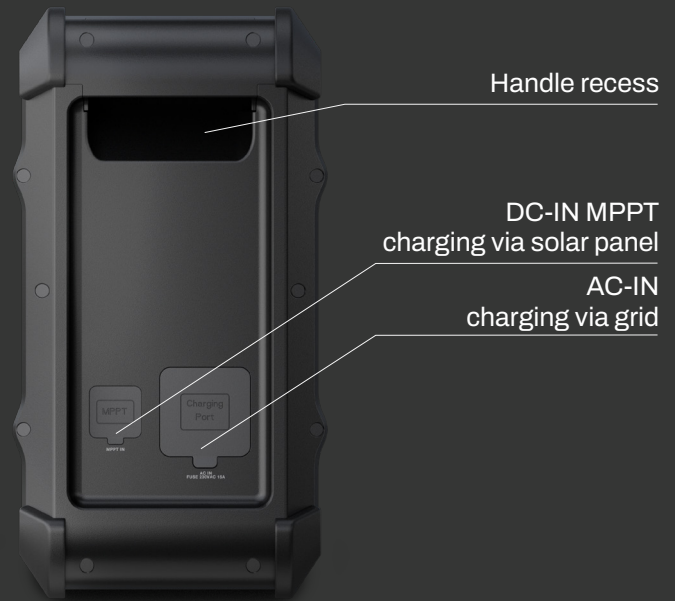

Handle recess

DC-IN MPPT
charging via solar panel

AC-IN
charging via grid

REAR VIEW

POWER2GO WORK

Your perfect companion on construction sites or for outdoor activities. Robust design and functionality characterize the POWER2GO WORK.



Handle/protective
frame/versatile
stand functions

Power Switch
ON/OFF

SOC display/
charging status

120 VAC outlet
with cover

FRONT VIEW



Handle/protective
frame/versatile
stand functions

DC-IN MPPT
charging via solar panel

AC-IN
charging via grid

REAR VIEW

Any questions?

Contact us, we will be pleased to advise you.

Headquarters

BMZ Germany GmbH

Zeche Gustav 1
63791 Karlstein am Main
Germany

T: +49 6188-9956-0
E: mail@bmz-group.com

BMZ USA Inc.

1429 Miller Store Road
Virginia Beach
VA 23455
USA

T: +1-757 821-8494
E: contact-usa@bmz-group.com

BMZ Company Ltd.

Julong Technology Building B
Cuibao Road, Longgang District,
Shenzhen, Guangdong Province
P.R.China 518116

T: +86 755 8977 5800
E: contact.cn@bmz-group.com

BMZ Poland Sp. z o.o.

Alberta Einsteina 9
44-109 Gliwice
Poland

T: +48 327842 450
E: BMZPolandSales@bmz-group.com

BMZ Innovation Group Ltd

Future Business Centre
Kings Hedges Road
Cambridge, CB4 2HY
United Kingdom

T: +44 7767 038663
E: power.uk@bmz-group.com

BMZ Japan KK

Shitaya 1-6-5, Taito-ku,
Tokyo, 110-0004
Japan

T: +81 35811 1973
E: tokio.kobayashi@bmz-group.com

BMZ France S.A.R.L.

16 Rue Auber
75009 Paris
France

T: +33 06 84 52 76 29
E: contact_bmzfrance@bmz-group.com

www.bmz-group.com

© BMZ 2024

All rights reserved. Preliminary data sheet. Although great care has been taken in the preparation of this data sheet, BMZ accepts no responsibility for any errors or omissions. All information contained herein is subject to change without notice.

